

WHAT IS IT

Multi-stage centrifugal pump, horizontal and self-priming, particularly suitable for constructing small and medium sized pressurisation systems; able to suck liquids mixed with air or gas.


MAIN USES



water supply and pressurization for irrigation of gardens and small cultivations




Water supply and pressurization for domestic and residential installations

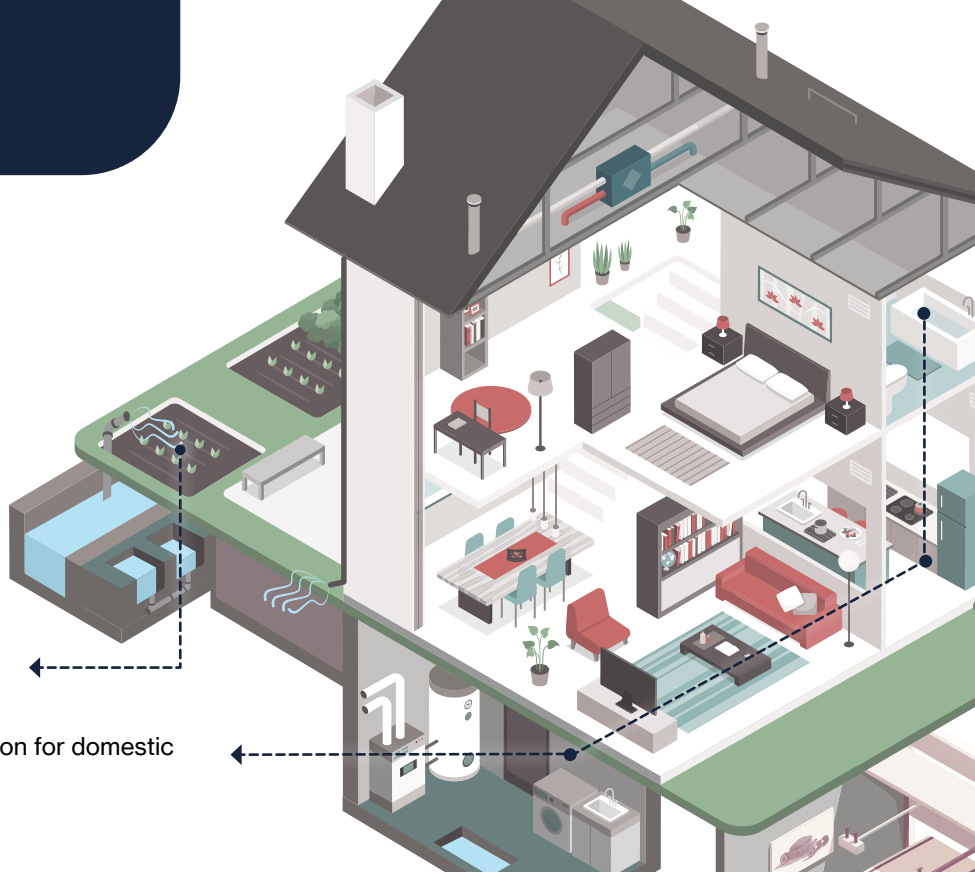

SPECIFICATIONS

Pump Body	Cast iron
Motor bracket	Cast iron
Impeller	Noryl®
Mechanical seal	Ceramic-Graphite
Motor shaft	Stainless steel AISI 416
Liquid temperature	0-50 °C
Operating pressure	Max 11 bar
Insulation class	F

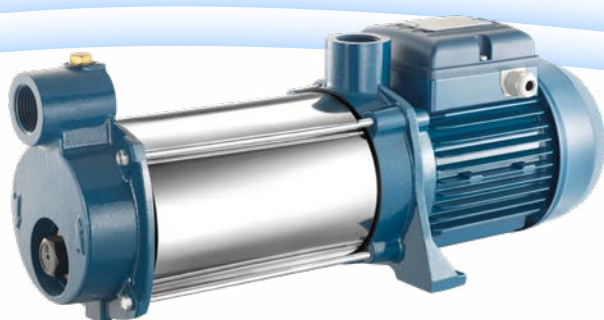

PLUS & PERFORMANCE



New self-priming system



Increased range of models



Better performance

MP/A 80/3

m³/h	1,2	2,4	3,6
l/min	20	40	60
H (m)	29,5	25	18,5

MP/A 100/4

m³/h	1,2	2,4	3,6
l/min	20	40	60
H (m)	40	34	26

MP/A 120/5

m³/h	1,2	2,4	3,6
l/min	20	40	60
H (m)	51,5	44,5	35